



SANWAYAUDIO

<https://www.china-sanway.com>

10W65-8

Electrical Parameters

Re	5.36 Ohm
Krm	0.0035 Ohm
Erm	0.7
Kxm	0.0076 Ohm
Exm	0.71
Cmes	232.84 μ F
Lces	18.553 mH
Res	114.75 Ohm
fs	76.6 Hz

Mechanical Parameters

(using laser)


Mms	46.251 g
Mmd (Sd)	38.967 g
Rms	1.731 kg/s
Cms	0.093 mm/N
Kms	10.71 N/mm
Bl	14.094 N/A
Lambda s	0.08

Loss factors

Qtp	0.6
Qms	12.855
Qes	0.601
Qts	0.574

Other Parameters

Vas	15.857 l
n0	1.14%
Lm	92.77 dB
Lnom	94.51 dB
rmse Z	2.92%
rmse Hx	1.12%
Series resist	0 Ohm
Sd	346.36 cm ²

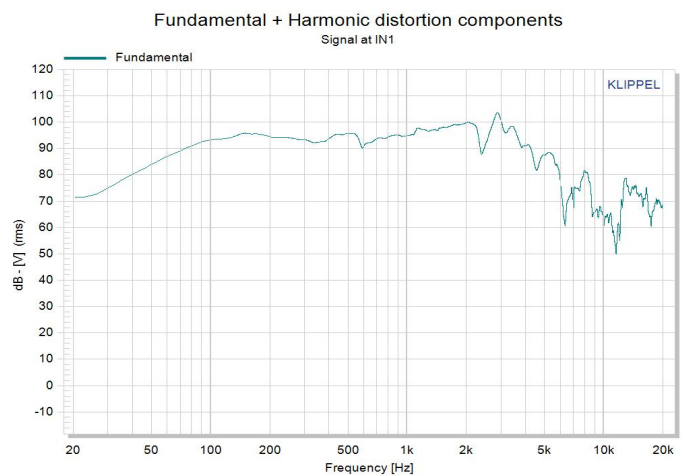

<https://www.china-sanway.com>