



SANWAY AUDIO

<https://www.china-sanway.com>

6NDM51-8



Electrical Parameters

Re	5.45 Ohm
Le	0.317 mH
L2	0.367 mH
R2	2.34 Ohm
Cmes	88.09 μ F
Lces	22.22 mH
Res	94.24 Ohm
fs	113.8 Hz

Mechanical Parameters

Mms	11.116 g
Mmd (Sd)	9.388 g
Rms	1.339 kg/s
Cms	0.176 mm/N
Kms	5.68 N/mm
Bl	11.233 N/A
Lambda s	-0.005


Loss factors

Qtp	0.326
Qms	5.933
Qes	0.343
Qts	0.325

Other Parameters

Vas	4.3910 l
n0	1.809 %
Lm	94.78 dB
Lnom	99.45 dB
rmse Z	3.02 %
rmse Hx	5.61 %
Series resistor	0.00 Ohm
Sd	132.73 cm ²

Frequency response measured with quasi-infinite baffle

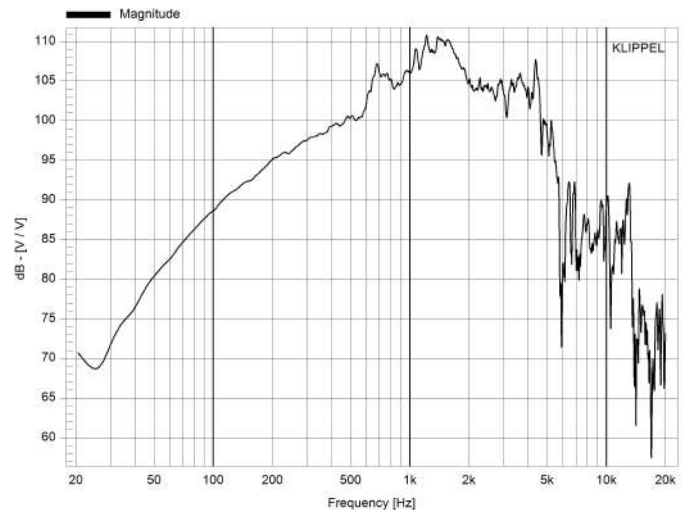

Impedance for 8Ω driver

